




**Digital Video**

# Laryngoscope

touching for life

**SmartScope VL Pro**

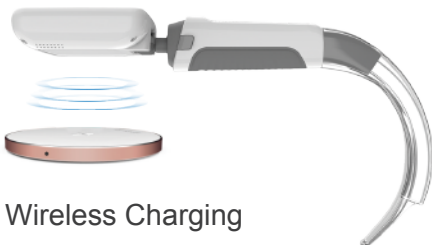

Wireless Charging



Safety



Fast

**HD**

HD



Easy







Cost Effective



**CFDA**

**CONTEC**

## Five solution for the Intubation

 <b>Safety</b>	 <b>Fast</b>	<b>HD</b> <b>High- Definition</b>	 <b>Easy</b>	 <b>Cost Effective</b>
<ul style="list-style-type: none"> <li>Ergonomic and durable design for long time usage</li> <li>High quality material with anti shatter protection for whole unit</li> <li>Disposable Blades avoid cross infection</li> <li>Anti- Fog Lens and Anti-Microbial Handle</li> </ul>	<ul style="list-style-type: none"> <li>Fast intubation after short time training</li> <li>Fast install or remove disposable blade</li> <li>Lightweight and portable</li> </ul>	<ul style="list-style-type: none"> <li>3.5 inch anti- reflective full touch display with 640*480 resolution</li> <li>2.0 Mega Pixel Camera provide 1280*720P photo and video</li> <li>Rotation angle for up-down <math>\geq 120^\circ</math> and left-right <math>\geq 270^\circ</math></li> </ul>	<ul style="list-style-type: none"> <li>One shot button for Recording</li> <li>One cable connect to PC for data management</li> <li>One cable connect to large LCD for better view (option)</li> <li>Full touch sree with user friendly operation</li> <li>Wireless charging</li> </ul>	<ul style="list-style-type: none"> <li>Favorable cost for all kinds of disposable blades</li> <li>Rechargeable battery for at least 4 hours working time</li> </ul>

## Suitable for

- Difficult incubation of glottic opening, easily guide the medical staff to accurately perform endotracheal intubation for anesthesia or first aid.



Anesthesia center



Respiratory department



ICU ward



Emergency center

## Technical Specifications

Display	Monitor: LCD
	Resolution Ratio: 640X480RGB
	Aspect Ratio: 4:3
	Video refresh Rata: 30FPS
Data output	Easy to establish and store files in JPEG or MP4. 16GB standard can be upgrade to 256GB. Connect to PC by USB-Type C cable.
Image output	Connect to external LCD by HDMI cable, convenient for training and presentation
Camera and image	Resolution Ratio 2.0M Pixels
	Field Angle: $\geq 60^\circ$
	Illuminance $\geq 1000\text{LUX}$
	Working distance: 20mm-100mm
	Color temperature $\geq 5000\text{K}$
Power and Battery	Type Rechargeable Lithium Battery
	Battery life Cycle: More Than 500 times
	AC100-240V, 50/60Hz, 50VA
	Charging times: less than 4hrs
Working Condition	5W Wireless Charging (Optional)
	Temperature: $-10\sim+45^\circ\text{C}$
Size and weight	Product Size: 245*100*130mm; Product weight: 0.28kg;
	Carton size: 345*120*282mm; Carton weight: 2.2kg; Packing quantity: 1pcs



S4 Adult large(6.0mm or more)



S3 Adult (6.0~9.0mm)



S2 Child (3.0~6.0mm)

Specification subject to be changed without prior notice.

# CONTEC

Stock Code:300869

## Contec Medical Systems Co.,Ltd.

ADD:No.112 Qinhuang West Street, Economic & Technical Development Zone, Qinhuangdao, Hebei Province, PEOPLE'S REPUBLIC OF CHINA

Tel: +86-335-8015430 Fax: +86-335-8015588 E-mail: cms@contecmed.com.cn Website: http://www.contecmed.com